

Reliable®

Model JL112 & J112 - Pendent

ECLH - Extended Coverage Light Hazard

ECOH - Extended Coverage Ordinary Hazard

ECO - Extended Coverage Ordinary

Hazard - Quick Response

Model JL112 & J112 ECLH/ECOH
Pendent & Recessed Pendent
(SIN R7216 – Link and RA7216 – Bulb)

Quick Response for Light Hazard

(16' x 16', 18' x 18' and 20' x 20' spacing)

Quick Response for Ordinary Hazard

(12' x 12' and 14' x 14' spacing)

Standard Response for Ordinary Hazard

(16' x 16', 18' x 18' and 20' x 20' spacing)

Features

1. Extended Coverage Ordinary Hazard and Light Hazard protection to 400 ft² (37.2m²) per sprinkler.
2. Nominal K = 11.2 (160).
3. Available in Pendent or Recessed Pendent styles.
4. Recessed pendent version provides 3/4" (19mm) adjustment to flush pendent position (see adjustment table).
5. Available in brass, chrome and polyester coated finishes.
6. For applications as per NFPA 13.

Approvals Organizations

1. Underwriters Laboratories, Inc. (UL)
2. Underwriters Laboratories of Canada (cULus)

UL Listing Category

Sprinklers, Automatic and Open Extended Coverage Sprinklers-Ordinary Hazard Occupancy UL Guide Number – VNIV.


The Reliable Model JL112 and J112 sprinkler are Extended Coverage Sprinklers for use in both Light and Ordinary Hazard 1 and 2 occupancies with a coverage area of up to 400 square feet per sprinkler. For ordinary hazard applications it is a Standard Response Sprinkler.

For all light hazard applications it is a Quick Response sprinkler. For ordinary hazard applications, it is a Standard Response sprinkler when the spacing is 16' x 16' and larger. When the spacing is 12' x 12' or 14' x 14', the sprinkler is Quick Response for ordinary hazard applications.


The use of ECLH/ECOH sprinklers can provide lower installation costs by requiring fewer sprinklers, less piping and reduced labor.

ECLH/ECOH sprinklers are to be installed according to the design criteria shown in this bulletin, NFPA 13, and all other local codes and ordinances. Flows and pressures as shown on pages 2 and 3 of this bulletin, must be used for the appropriate spacing and for the designated hazard classifications.

SIN RA 7216 is Corrosion Resistant with White Polyester Coating.

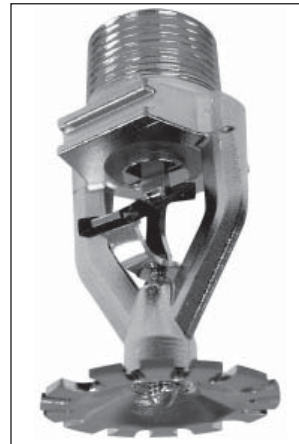

**Model JL112 Pendent
(R 7216)**

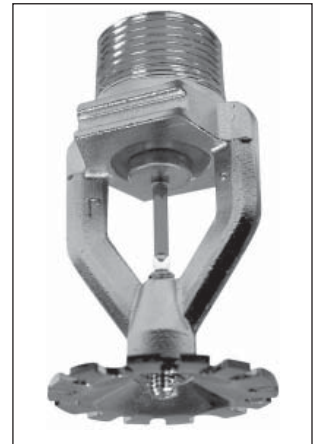

**Model J112 Pendent
(RA 7216)**

This ECLH/ECOH sprinkler is available in various finishes, which includes a white polyester corrosion resistant finish.

ECLH/ECOH sprinklers are available in a pendent or an attractive recessed pendent type which provides up to 3/4" (19mm) of escutcheon adjustment.

Design Criteria

Reliable Model JL112 & J112 ECLH/ECOH sprinklers shall only be used in systems designed and installed in accordance with NFPA 13 and all other local codes and ordinances. The following design criteria also apply:

- Minimum sprinkler spacing is 8 ft.
- Sprinklers have a minimum flow requirement for each spacing as shown in the Flow Requirements Table on the reverse side.
- Sprinklers are only to be used in systems hydraulically designed per NFPA 13.
- Deflector to commodity clearance shall be a minimum of 18 in (457mm).
- ECOH sprinklers shall be installed in unobstructed constructions as defined in NFPA 13. For open web truss construction web thickness is not to exceed 1 inch.
- ECOH sprinklers which are installed above the bottom of a horizontal obstruction, shall have their deflectors located as shown in the Obstruction Table on page 3.
- Sprinklers can be installed under a sloping ceiling not exceeding 2 inches of rise in 12 inches.
- Maximum working pressure is 175 psi at the sprinkler.

Sprinkler Model Specifications

Sprinkler Model	Type	Temperature Rating		Max. Ceiling Temp.		Maximum Sprinkler Spacing	Maximum Coverage Area	THD Size	Approvals
		°F	°C	°F	°C				
JL112 ECLH/ECOH- R7216	Link/Pendent	165 212	74 100	100 150	38 66	20'	400 ft²	¾"NPT	1,2
JL112 ECLH/ECOH- R7216	Link/Recessed								
J112 ECLH/ECOH- RA7216	Bulb/Pendent	155 200	68 93	100 150	38 66	20'	400 ft²		
J112 ECLH/ECOH- RA7216	Bulb/Recessed								

(1) For metric equivalent see **Conversion Table**.

Flow Requirements - Light Hazard - Quick Response

Spacing	Coverage Area	Flow (gpm)	Pressure (psi)	"K" Factor	
				US	Metric
16' x 16'	256 ft²	30	7.2	11.2	160.0
18' x 18'	324 ft²	33	8.7		
20' x 20'	400 ft²	40	12.8		

(1) For metric equivalent see **Conversion Table**.

Flow Requirements - Ordinary Hazard - Standard Response

Spacing	Coverage Area	Ordinary Hazard 1		Ordinary Hazard 2		"K" Factor	
		0.15 gpm/ft² Density		0.20 gpm/ft² Density		US	Metric
		*Flow	*Pressure	*Flow	*Pressure		
16' x 16'	256 ft²	39	12.1	51	20.7	11.2	160.0
18' x 18'	324 ft²	49	19.1	65	33.7		
20' x 20'	400 ft²	60	28.7	80	51.0		

* Flow is in gpm and pressure is in psi

(1) For metric equivalent see **Conversion Table**.

Flow Requirements - Ordinary Hazard - Quick Response

Spacing	Coverage Area	Ordinary Hazard 1		Ordinary Hazard 2		"K" Factor	
		0.15 gpm/ft² Density		0.20 gpm/ft² Density		US	Metric
		*Flow	*Pressure	*Flow	*Pressure		
14' x 14'	196 ft²	30	7.2	39	12.1	11.2	160.0
12' x 12'	144 ft²						

* Flow is in gpm and pressure is in psi

(1) For metric equivalent see **Conversion Table**.

(1) Conversion Table	
1 in = 25.4 mm	1 gpm = 3.785 lpm
1 ft = 0.3048 m	1 gpm/ft² = 40.74 mm/mim
1 ft² = 0.093 m²	1 psi = 0.6895 bar

Recess Escutcheons

F1/F2



Model J1

Sprinkler Wrench

Use Model J1 Wrench for JL112 & J112 ECLH/ECOH Pendent Sprinkler Removal and Installation

FP



Model RJ

Sprinkler Wrench

Use Model RJ Wrench for JL112 & J112 ECLH/ECOH Recessed Sprinkler Removal and Installation

J1 Wrench



RJ Wrench



Recessed Pendent ECLH/ECOH Adjustments ⁽¹⁾

Escutcheon	ECLH		ECOH	
	R7216	RA7216	R7216	RA7216
FP	3/4	3/4	3/4	3/4
F1	(2)	(2)	3/4	3/4
F2	1/2	1/2	1/2	1/2

* Adjustments in inches.

(1) For metric equivalent see **Conversion Table**.

(2) Not listed by UL or cULus.

Finishes

Sprinkler Finishes	
Sprinkler	Escutcheon
Bronze Chrome White Polyester Coated	Brass Chrome White Painted

Ordering Information

1. Sprinkler Model
2. Temperature Rating
3. Finish
4. Escutcheon and finish (where applicable)

Corrosion Resistant		
J112 ECLH/ECOH	Bulb	
	°F	°C
	155 200	68 93

Minimum Flow Requirements For Earlier Editions of NFPA 13 - FOR REFERENCE ONLY

Spacing	Coverage Area	NFPA13 - 1991 Requirements				NFPA13 - 1989 Requirements						"K" Factor	
		Ordinary Hazard 1		Ordinary Hazard 2		Ordinary Hazard 1		Ordinary Hazard 2		Ordinary Hazard 3		US	Metric
		0.15 gpm/ft ² Density		0.20 gpm/ft ² Density		0.16 gpm/ft ² Density		0.19 gpm/ft ² Density		0.21 gpm/ft ² Density			
		*Flow	*Pressure	*Flow	*Pressure	*Flow	*Pressure	*Flow	*Pressure	*Flow	*Pressure		
14' x 14' and less	196 ft ²	30.2	7.0	39.2	11.9	31.4	7.6	37.3	10.7	41.2	13.0	11.4	164.4
16' x 16'	256 ft ²	38.4	11.4	51.2	20.2	41.0	12.9	48.7	18.2	53.8	22.3		
18' x 18'	324 ft ²	48.6	18.2	64.8	32.3	51.9	20.7	61.6	29.2	68.0	35.7		
20' x 20'	400 ft ²	60.0	27.7	80.0	49.3	64.0	31.5	76.0	44.5	84.0	54.3		

* Flow is in gpm and pressure is in psi

(1) For metric equivalent see **Conversion Table**.

Installation Requirements for Under Concrete Tees - cULus

- The stems of the concrete tee construction must be spaced at less than 7.5 feet (2.3m) on center but more than 3 feet (0.9m) on center. The depth of the concrete tees must not exceed 30 inches (762mm). The maximum permitted concrete tee length is 32 feet (9.8m); however, where the concrete tee length exceeds 32 feet (9.8m), non-combustible baffles, equal in height to the depth of the tees, can be installed so that the longitudinal space between the tees does not exceed 32 feet (9.8m) in length.
- The sprinkler deflectors are to be located in a horizontal plane at or above 1 inch (25.4mm) below the bottom of the concrete tee stems.
- When the sprinkler deflectors are located higher than a horizontal plane 1 inch (25.4mm) beneath the bottom of the concrete tee stems, the obstruction to sprinkler discharge criteria requirements of NFPA 13 for extended coverage upright sprinkler applies.

Location of Deflector to Horizontal Obstruction

Distance from Sprinkler to Side of Obstruction	Maximum Allowable Distance Deflector Above Bottom of Obstruction
Less than 1'	0"
1' to less than 1' - 6"	0"
1' - 6" to less than 2'	1"
2' to less than 2' - 6"	1"
2' - 6" to less than 3'	1"
3' to less than 3' - 6"	3"
4' to less than 4' - 6"	5"
4' - 6" to less than 5'	7"
5' to less than 5' - 6"	7"
5' - 6" to less than 6'	7"
6' to less than 6' - 6"	9"
6' - 6" to less than 7'	11"
7' and greater	14"

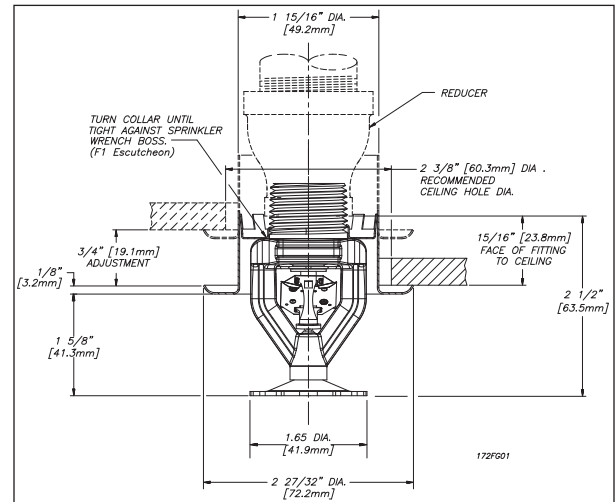


Fig. 1 - F1 Escutcheon

(1) For metric equivalents see **Conversion Table**.

Solder Link			Bulb			
Classification	°F	°C	Classification	°F	°C	Bulb Color
Ordinary	165	74	Ordinary	155	68	Red
Intermediate	212	100	Intermediate	200	93	Green

The equipment presented in this bulletin is to be installed in accordance with the latest published Standards of the National Fire Protection Association, Factory Mutual Research Corporation, or other similar organizations and also with the provisions of governmental codes or ordinances whenever applicable. Products manufactured and distributed by Reliable have been protecting life and property for over 90 years, and are installed and serviced by the most highly qualified and reputable sprinkler contractors located throughout the United States, Canada and foreign countries.

Manufactured by



The Reliable Automatic Sprinkler Co., Inc.
 (800) 431-1588 Sales Offices
 (800) 848-6051 Sales Fax
 (914) 829-2042 Corporate Offices
 www.reliablesprinkler.com Internet Address



Recycled Paper

Revision lines indicate updated or new data.

EG. Printed in U.S.A 2/10

PN 9999970310